

REWRITABLE RECORDING MEDIUM AND ITS RECORDING METHOD

Publication number: JP5062189

Publication date: 1993-03-12

Inventor: KISHIMOTO YOSHIO; SUZUKI MASAOKI

Applicant: MATSUSHITA ELECTRIC IND CO LTD

Classification:

- international: **B41M5/26; G11B7/00; G11B7/24; B41M5/26; G11B7/00; G11B7/24;** (IPC1-7): B41M5/26; G11B7/00; G11B7/24

- european:

Application number: JP19910219537 19910830

Priority number(s): JP19910219537 19910830


Report a data error here

Abstract of JP5062189

PURPOSE: To provide a recording medium wherein a recording operation and an erasing operation can be performed reversibly by means of light or heat by a recording layer wherein the following are contained: coloring particles whose surface is provided with a crystal nucleus formation ability as crystalline organic molecules; crystalline organic molecules; and a transparent matrix polymer.

CONSTITUTION: A polyester sheet provided with an aluminum vapor-deposited reflection layer 2 is used as a substrate 1. The reflection layer 2 is coated to a thickness of 13μm, with a liquid in which the following are dispersed and dissolved in tetrahydrofuran:

hydroxystearic acid as crystalline organic molecules; a phenol-based antioxidant as an additive; a vinyl chloride-vinyl acetate copolymer as a transparent matrix polymer; and red glass beads in an average of 15μm as coloring particles 4. Thereby, a recording layer 3 is formed. In addition, a UV-curing acrylic resin is coated as a surface protective layer 6. The title recording medium becomes transparent at about 70 to 90 deg.C, and its recording operation can be performed at 100 deg.C by using a semiconductor laser. The recording durability of the recording medium amounts to about 600 times.

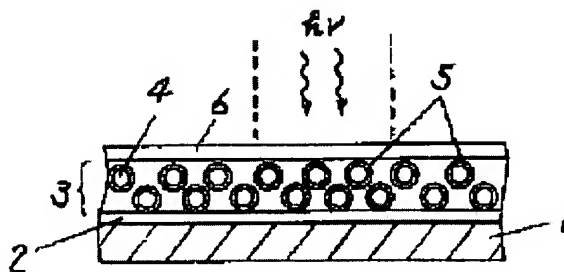

Data supplied from the esp@cenet database - Worldwide